
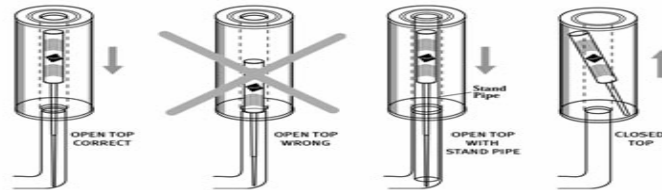


The Spa Depot®

Nature2 Pro Starter Kit #KT1005 Quick-Start Guide

1. Start with a clean tub, and new or clean filter cartridge(s).
2. Fill spa with fresh water and operate circulating pump.
3. Test water with MPS 3-way test strips; adjust if necessary using Alkalinity Increaser or pH Decrease. Total Alkalinity should be 80-120 ppm and pH between 7.2-7.8. Read all package instructions for more information.
4. Test water hardness with Hardness Test strips. If below 150 ppm, add Hardness Increaser to attain at least that level.
5. Add Sea Klear natural clarifier at the rate of 1 oz. per 500 gallons.
6. Add Metal Free stain & scale preventer per label directions.
7. Shock water upon initial filling with granular dichlor chlorine at the rate of 1 teaspoon per 250 gallons (see notes below for more about shocking).
8. Allow water to circulate to equilibrate spa chemicals.
9. Remove Nature2 from package and connect the support stems.
10. Shut spa off and remove filter.
11. Slide device into filter cartridge core per examples below; reinstall filter:



12. When installed, the Nature2 device must be at least 1" above the bottom of the filter to assure proper water flow, and to prevent blockage.
13. Before each use, add 1 tablespoon Oxy-Spa non-chlorine MPS shock per 250 gallons. Weekly, add 3 tablespoons, or as needed per MPS test strips. Keep ZorbO oil scum absorber in spa for cleaner water.

NOTES:

- Use the MPS test strips weekly to measure Oxy-Spa MPS shock to determine if level is sufficient. (Use of dichlor chlorine is optional).
- Dichlor chlorine shock is used upon filling to quickly activate the Nature2 cartridge, and eliminate residual contaminants in the spa & plumbing system. If water becomes hazy, especially after heavy bather load, use dichlor at the rate of 1 teaspoon per 250 gallons to clear the water.
- Add Sea Klear weekly for water quality.
- Non-chlorine MPS shock tends to lower pH and Total Alkalinity. Monitor these levels weekly with test strips, and adjust as necessary with Spa Up.
- Drain spa, clean filters, repeat startup procedure, and replace Nature2 cartridge every 4 months.
- Nature2 is not compatible with bromine or biguanides. Be sure to drain spa and refill with fresh water if these products have been used.
- Read all package directions for additional information.

www.SpaDepot.com
(800) 823-3638